


HUR MAN GER CIRCLE K SERVICE-ÅTKOMST TILL DIN ZAPTEC LADDARE


1. Logga in i zaptec-portalen <https://portal.zaptec.com/>

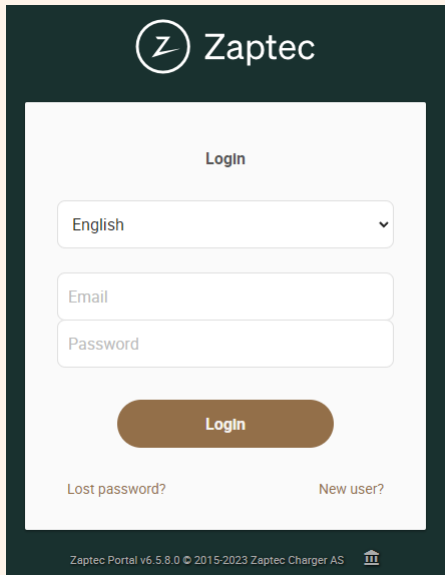


The image shows the Zaptec login page. At the top is the Zaptec logo. Below it is a 'Login' section with a language dropdown menu set to 'English'. There are input fields for 'Email' and 'Password'. A brown 'Login' button is below the password field. At the bottom of the login section are links for 'Lost password?' and 'New user?'. The footer of the page indicates 'Zaptec Portal v6.5.8.0 © 2015-2023 Zaptec Charger AS'.

Logga in med ditt användarnamn och lösenord.

2. Gå till "installationer/installations"

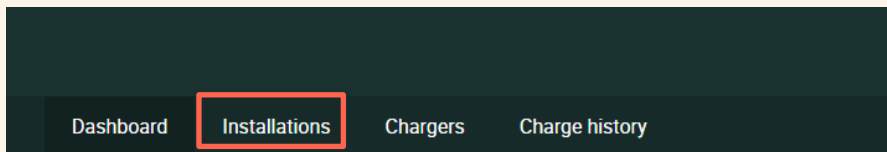


3. Välj installationen du vill att Circle K ska ha åtkomst till.

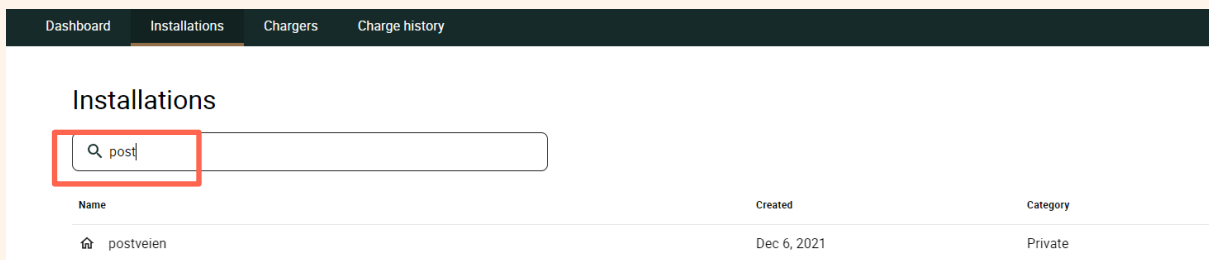

The image shows the 'Installations' page in the Zaptec portal. At the top is a search bar with a magnifying glass icon and the text 'post'. Below the search bar is a table with three columns: 'Name', 'Created', and 'Category'. There is one row of data.


Name	Created	Category
🏠 postveien	Dec 6, 2021	Private

4. Gå till "Åtkomster/permissions"

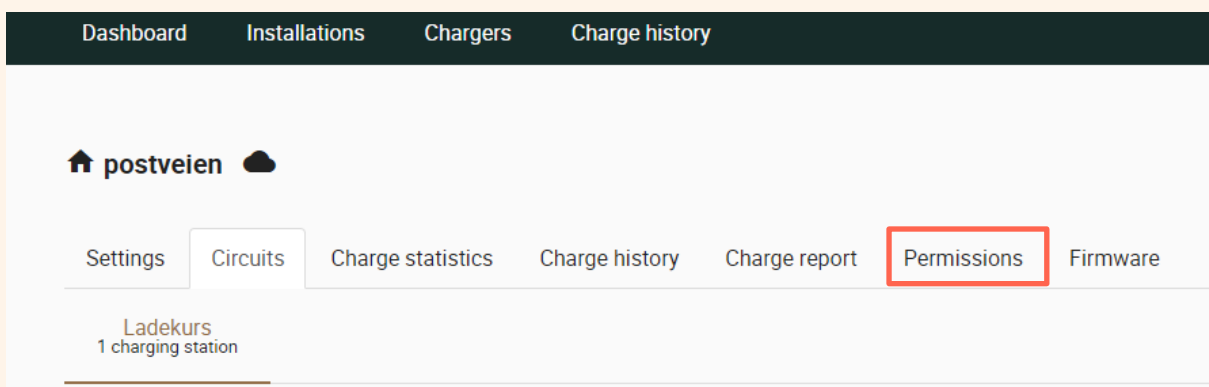

HUR MAN GER CIRCLE K SERVICE-ÅTKOMST TILL DIN ZAPTEC LADDARE

5. Tryck på "ge åtkomst/give permission"

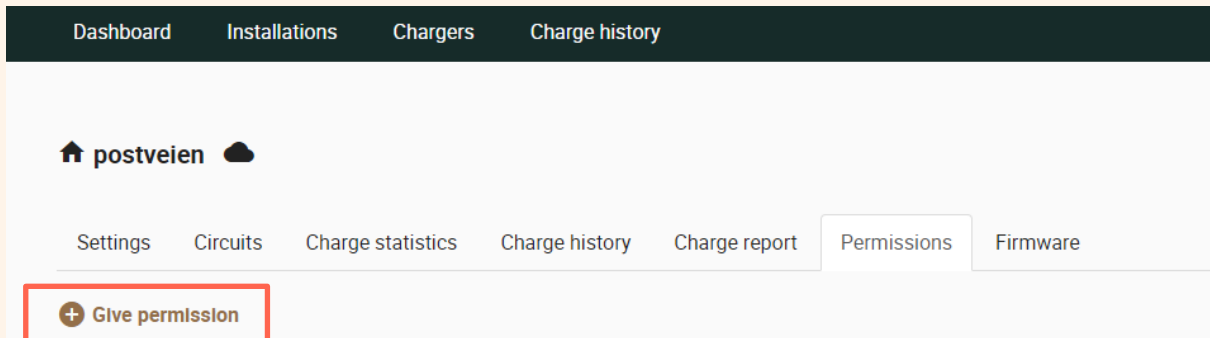

6. Lägg till Circle K som partner. Skriv i sökfältet: **MV40**

Choose who should be given permission

Users Partner

5NMB Search

	NAME
☒	Circle K

Next

7. Det är viktigt att Circle K får åtkomst till 'Service'.

ADD PERMISSION

Choose user roles

	ROLE	DESCRIPTION
☐	User	Permission to charge on all installation charging stations
☐	Owner	Permission to change most settings, access usage data and give other users permission to the installation
☒	Service	Permission to change technical settings. This role is only intended for certified service partners

Previous Next

HUR MAN GER CIRCLE K SERVICE-ÅTKOMST TILL DIN ZAPTEC LADDARE

1. Välj "Inställningar" och "Autentisering"

a) Välj OCPP-J 1.6 Autentisering

a) Klistra in detta i URL-fältet: `wss://ocpp.circlek.com/{deviceId}`

b) Tryck på "Spara"

The screenshot shows the 'Settings' page of a Zaptec charging station. The 'Authentication' tab is selected. Under 'Authentication type', 'OCPP 1.6J cloud authentication' is chosen. The 'URL' field is populated with 'wss://ocpp.circlek.com/'. Below this, there are fields for 'Initial device password' and 'Default ID tag'. The 'Authorisation required' toggle is turned on. At the bottom, there are 'Save' and 'Discard' buttons.

Settings Circuits Charge statistics Charge history Charge report Permissions Firmware

Details Authentication Power management Advanced

Authentication type

☐ Zaptec Native authentication
To authorise Zaptec charging stations via the Zaptec app or Zaptec Portal registered RFID.

☐ Webhooks authentication
To integrate 3rd-party charging authorisation, and payment providers, with Zaptec charging stations.

☒ OCPP 1.6J cloud authentication
For integrating Zaptec charging stations with 3rd-party OCPP operators, via our cloud services, and utilising Zaptec's phase and load balancing features.

OCPP 1.6J cloud authentication

URL ⓘ
wss://ocpp.circlek.com/
wss://example.com/ocpp/{deviceId}

Initial device password ⓘ Default ID tag ⓘ

☒ Authorisation required ⓘ

☐ Use legacy OCPP behaviour ⓘ

☐ Disable authorisation when charging stations are offline ⓘ

Save Discard

Operatören har nu ändrats till Circle K.